


TEST ANALYSIS REPORT

(As Per IS:303-1989)



FACES	Peeled Gurjan veneer Faces
INNER LAYERS	100% Premium Hardwood
GLUE	Melamine Urea Formaldehyde (MUF)

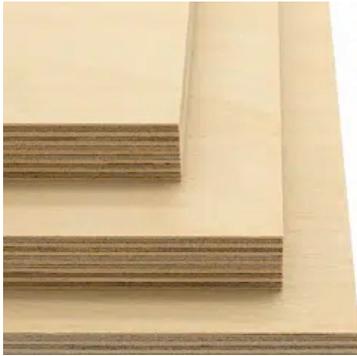

Moisture
Resistant



Borer & Termite
Resistant

THICKNESS	6 MM	9 MM	12 MM	16 MM	19 MM	25 MM
NO. OF PLYS	5 PLY	7 PLY	9 PLY	11 PLY	13 PLY	17 PLY

TEST ANALYSIS REPORT (As Per IS:710-2010)

TYPES OF TESTS	REFERENCE VALUE	OBSERVED VALUE
Surface	AA/AB/BB	AA
Resistance to water 3 cycle each cycle consisting of 3hrs at 60±2°C. in water and drying 8 hrs at 65±2°C	Pass Standard	Confirmed

SUNTREE SOLID MR (IS:303)

Modulus of Elasticity Parallel to Face Grain(Avg) Across the Face Grain (Avg)	4000N/Sq mm 5330N/Sq.mm	5330N/Sq.mm 4210N/Sq.mm
Modulus of Rupture Parallel to Face Grain (Avg) Across the Face Grain Avg)	30 N/Sq.mm 15 N/Sq.mm	45 N/Sq.mm 30 N/Sq.mm
Mycological Test	Pass Standard	Confirmed
Moisture Content	Not less than 5% Not more than 15%	10%